


Hewitt Flat Front® Frame  
Specification Sheet




909 S Poplar St  
LaGrange, IN 46761  
260-463-2220  
LCCOVERS.COM

Washer location on the ends.

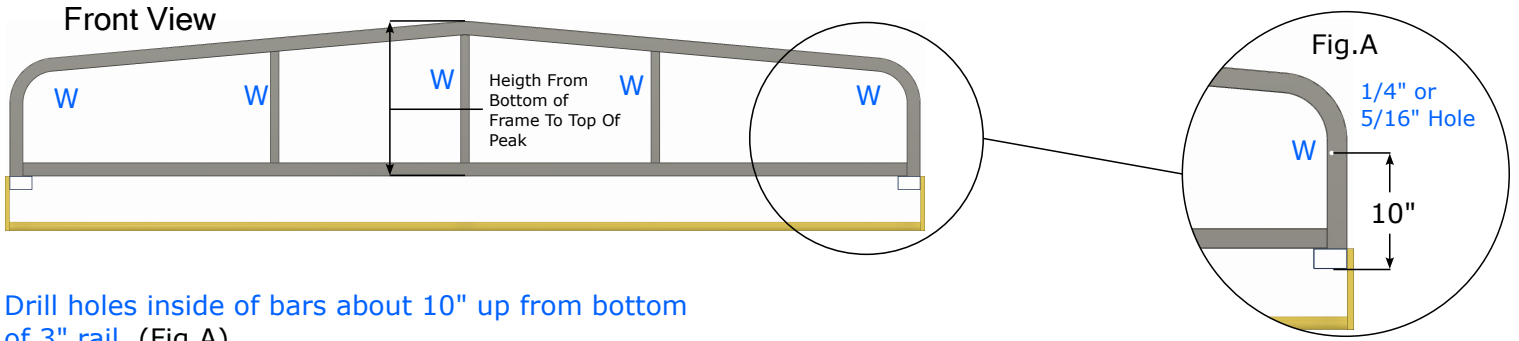

Drill holes inside of bars about 10" up from bottom of 3" rail (Fig.A)  
Each end of the frame will have small washers to attach S hooks

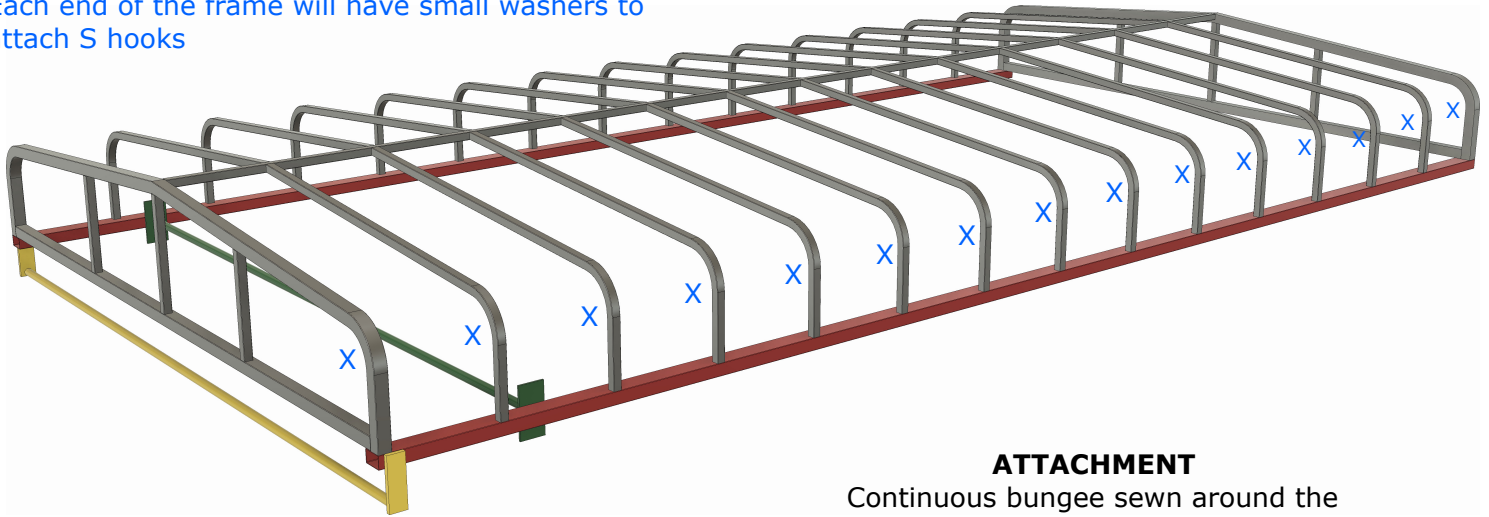

**ATTACHMENT**

Continuous bungee sewn around the perimeter of the cover.

S Hooks attach to the bungee and then hook into the frame.

¼" Holes may need to be drilled into frame.

Standard Valance: 12"  
Extended Valance: 24"

FRAME OPTIONS		ALL MEASUREMENTS (± 1")	
Size	OVERALL LENGTH	INSIDE WIDTH	OUTSIDE WIDTH
10' X 71"	10'	65"	71"
12' X 71"	12'	65"	71"
10' X 100"	10'	94"	100"
12' X 100"	12'	94"	100"
18' X 100"	18'	94"	100"
20' X 100"	20'	94"	100"
10' X 110"	10'	104"	110"
12' X 110"	12'	104"	110"
18' X 110"	18'	104"	110"
20' X 110"	20'	104"	110"
12' X 120"	12'	114"	120"
20' X 120"	20'	114"	120"

**NOTES**

Order Information	
OVERALL LENGTH OF FRAME	
INSIDE WIDTH OF FRAME	
OUTSIDE WIDTH OF FRAME	

**CONTACT INFORMATION**

Name\_

Address\_

City\_

State\_ Zip\_

Phone\_

Email\_